# ANTIOCH CALIFORNIA OPPORTUNITY LIVES HERE

## Roof Replacements at Antioch Water Park and Water Treatment Plant Bid No. 770-1130-22A

# ADDENDUM NO. 1 Dated November 17, 2022

## Changes to Specifications

1. On Page 7 of 18 replace guideline 2. Through 6. with the following:

## Antioch Water Treatment Plant concrete Deck Coating – 401 Putman St

(Building #10 on map)

- 1. Beat blast entire surface.
- 2. Prime roof surface with GarlaBlock 2k.
- 3. Reinforce all seams with polyester reinforced butyl tape.
- 4. Install Base Coat of Liquitec at 2.5G per 100sqft.
- 5. Install Top Coat of Liquitec at 2.5G per 100sqft.
- 2. On Page 8 of 18 **replace** Antioch Water Park Map with Addendum No. 1 Map attached herein as Exhibit No. 1.

#### Additions to Specifications:


 Insert the following section on Page 8 of 18 below <u>Antioch Water Park – 4701 Lone Tree Way</u>, guideline 15. Flashings, details, clean up, etc.:

#### Antioch Water Park Siding

- 1. Cut existing wood siding a minimum of 2ft vertically to remove all existing dry rot 765sq ft
- 2. Install new 2 ply modified base flashings at roof to wall.
- 3. Install new 2 piece reglet at roof to wall termination.

This addendum must be included with your bid:

Company Name	
Date Received	
Signature	
Name	
Title	

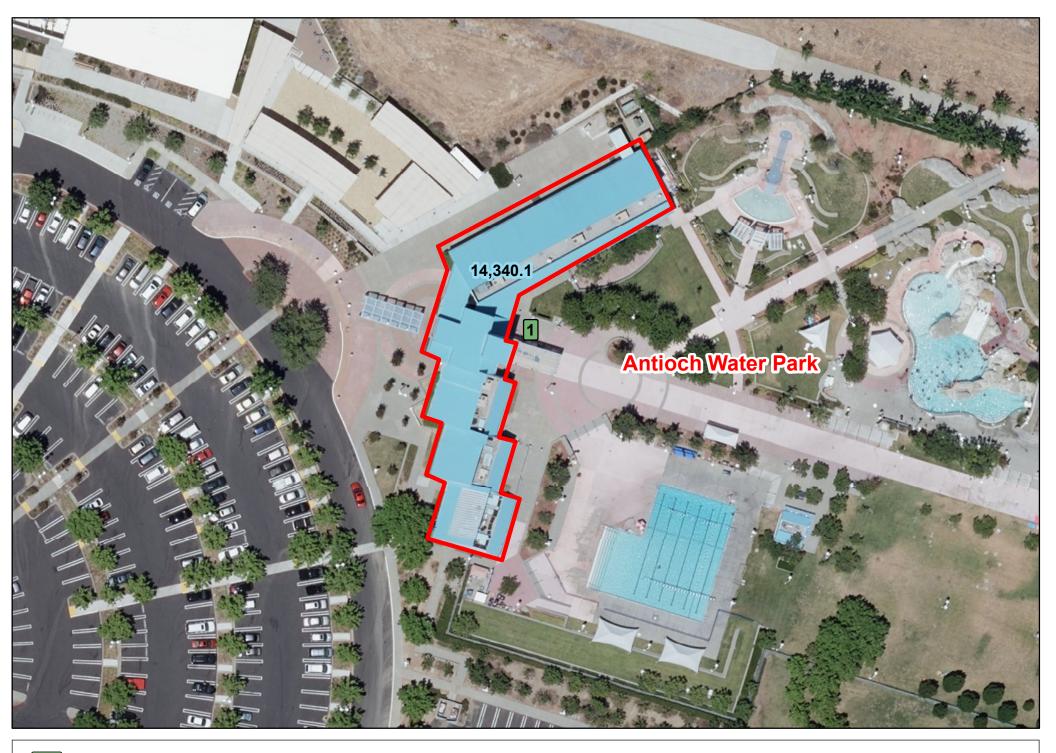

**1,2,3** Building Number Roofing Materials 1. Metal / Torch Down

**1,2,3** Roof Area (ft<sup>2</sup>)

